


minimalist design with maximalist features

- A** Delta-lift® hull: offering easy planing with integrated Delta tabs aft
- B** Replaceable transoms; easy choice of Short and Long shaft outboards
- C** Standard hydraulic steering
- D** Ergonomic consoles
- E** Sturdy acrylic glove box for loose items
 - USB charging port and main cut off switch inside
- F** Standard fuel system with integral fuel tank, fuel gauge and water separator
- G** Standard electrical system with the following:
 - Switch panel
 - LED navigation lights
 - All-round light (socket type)
 - Automatic bilge pump
- H** Self-bailing deck
- I** Large storage areas
- J** Marine upholstery
- K** Sturdy Hypalon (CSM) tubes
- L** Standard
 - Swimming ladder
 - Telescopic cleats
 - Lifting rings



all with the traditional Northstar quality

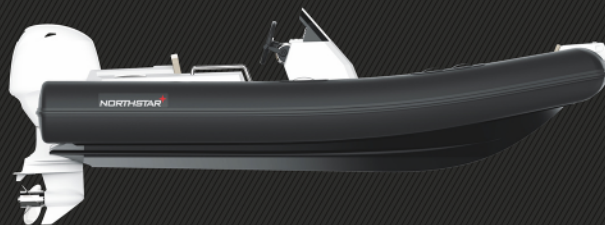

NORTHSTAR
AXIS
TENDERS

Northstar AXIS Tenders have been developed to answer all the critical needs for a functional, ergonomic and performing yacht tender. AXIS Tenders are offered in 6 different lengths between 3.1m (10'2") and 5.3m (17'5") to fit a variety of swimming platforms and garages. Benefiting from the Delta-lift hull shape with integrated delta tabs aft, all AXIS tenders plane very easily and ride dry. Fitted with standard features like Hydraulic Steering, CSM (Hypalon) tubes, built-in fuel tank, pop-up cleats, extensive electrical system with auto bilge pump, navigation lights and USB charging socket, an AXIS tender is ready to become your indispensable tool around your yacht.

TUBE COLORS

- WHITE
- LIGHT GREY
- DARK GREY
- BLACK

HULL COLORS

- WHITE
- GREY
- BLACK

UPHOLSTERY COLORS

- CHAMPAGNE
- SAHARA YELLOW
- MANDARIN
- SHARK GREY



RIBTECH DENİZ ARAÇLARI ÜRETİMİ A.Ş.
Yazıbaşı Mah. 306 Sok. No:3/1
35875 Torbalı / İzmir / Turkey

NORTHSTAR
www.northstarboats.com

Non contractual document. All information presented subject to change without notice.



NORTHSTAR
AXIS
TENDERS



AXIS 31

Length	3.1 m / 10'2"
Beam	1.82 m / 5'11"
Weight	185 kg / 407 lbs
Tube Diameter	0.40 m / 15.7"
Suggested Tube Pressure	0.18 bar / 2.6 psi
No. of Chambers	3
Maximum Persons	3
Maximum Power	20 HP
Minimum Power	20 HP
Recommended Power	20 HP
Stair Length	5.1 m
Fuel Tank Capacity	33 l / 8.7 US Gal
Design Category	CE - Cat. C

AXIS 34

Length	3.4 m / 11'2"
Beam	1.70 m / 5'6"
Weight	205 kg / 452 lbs
Tube Diameter	0.40 m / 15.7"
Suggested Tube Pressure	0.18 bar / 2.6 psi
No. of Chambers	3
Maximum Persons	3
Maximum Power	25 HP
Minimum Power	20 HP
Recommended Power	20 HP
Stair Length	5.1 m
Fuel Tank Capacity	33 l / 8.7 US Gal
Design Category	CE - Cat. C

AXIS 38

Length	3.8 m / 12'6"
Beam	1.82 m / 5'11"
Weight	225 kg / 500 lbs
Tube Diameter	0.40 m / 15.7"
Suggested Tube Pressure	0.18 bar / 2.6 psi
No. of Chambers	3
Maximum Persons	3
Maximum Power	30 HP
Minimum Power	20 HP
Recommended Power	20 HP
Stair Length	5.1 m
Fuel Tank Capacity	33 l / 8.7 US Gal
Design Category	CE - Cat. C

AXIS 4.2

Length	4.2 m / 13'9"
Beam	1.82 m / 5'11"
Weight	265 kg / 583 lbs
Tube Diameter	0.40 m / 15.7"
Suggested Tube Pressure	0.18 bar / 2.6 psi
No. of Chambers	3
Maximum Persons	4
Maximum Power	40 HP
Minimum Power	20 HP
Recommended Power	20 HP
Stair Length	5.1 m
Fuel Tank Capacity	42 l / 11.1 US Gal
Design Category	CE - Cat. C

AXIS 4.8

Length	4.8 m / 15'7"
Beam	2.20 m / 7'3"
Weight	430 kg / 947 lbs
Tube Diameter	0.40 m / 15.7"
Suggested Tube Pressure	0.18 bar / 2.6 psi
No. of Chambers	3
Maximum Persons	5
Maximum Power	50 HP
Minimum Power	20 HP
Recommended Power	20 HP
Stair Length	5.1 m
Fuel Tank Capacity	51 l / 13.5 US Gal
Design Category	CE - Cat. C

AXIS 5.3

Length	5.3 m / 17'5"
Beam	2.20 m / 7'3"
Weight	480 kg / 1058 lbs
Tube Diameter	0.40 m / 15.7"
Suggested Tube Pressure	0.18 bar / 2.6 psi
No. of Chambers	3
Maximum Persons	5
Maximum Power	70 HP
Minimum Power	20 HP
Recommended Power	20 HP
Stair Length	5.1 m
Fuel Tank Capacity	62 l / 16.4 US Gal
Design Category	CE - Cat. C